



# **Ari** Cotton Like

**AriPam spun fabrics for shoe lining  
and ultra durable workwear**



**Uv Protection**




Ariteks, founded as a family owned business in 1975, is the leading textile manufacturer company both in fashion and technical textiles.

By continuously developing high-end technologies it provides solutions to end users in apparel, protective workwear, functional sport, medical wear as well as technical textiles in construction and transportation industries.


As the pioneer company in special dyeing methods like indigo, vat, space-dye, coating and laminating systems, Ariteks produces highest-quality fabrics both for international and domestic markets.

Ariteks uses clean and renewable energy resources. It consumes minimum amount of water by using continuous optimised systems.

Based in 14000m<sup>2</sup> with 12 separate in house R&D laboratories, the company spends 5% of its budget for research and developing future technologies. It focuses especially on 3rd generation solar cells on flexible fabrics and biosensing textiles.

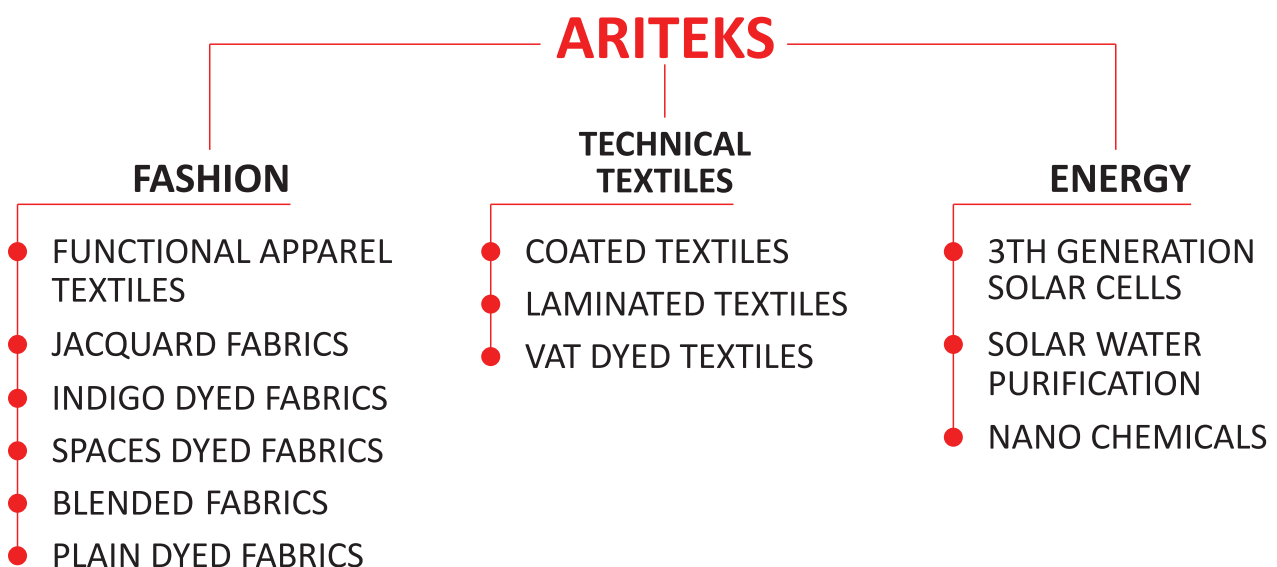

## CONTENT

<b>1</b>	<b>Ari Gabardin 245</b> 245 gr/m <sup>2</sup> , 100% AriPam, 3/1 S Twill Woven Fabric		4-5
<b>2</b>	<b>Ari Gabardin 7/7</b> 390 gr/m <sup>2</sup> , 100% AriPam, 3/1 S Twill Woven Fabric		6-7
<b>3</b>	<b>Ari Bez</b> 180 gr/m <sup>2</sup> , 100% AriPam, 1/1 Plain Woven Fabric		8-9
<b>4</b>	<b>Ari Penye</b> 140 gr/m <sup>2</sup> , 100% AriPam, Jersey Knit Fabric		10-11
<b>5</b>	<b>Ari Pike</b> 210 gr/m <sup>2</sup> , 100% AriPam, Uv protective, Pique Knit Fabric		12-13



245 gr/m<sup>2</sup>, 100% AriPam,  
Uv protective,  
3/1 S Twill Woven Fabric



## Sample



**Ari Gabardin 245 - 5469  
Navy**



**Ari Gabardin 245 - 5470  
Black**



**Ari Gabardin 245 - 5471  
Grey**



## Description

100% AriPam spun twill fabric. It is used as a lining inside of the shoes.

Ari Gabardin 245 can also be used for outdoor jackets, safety jackets, pants and trousers.

## Technical Parameters

Name	Values	Standards
Fiber	100% AriPam	EN ISO 2076
Yarn	30/2 Ne	EN ISO 2060
Weight	245 ±10 gr/m <sup>2</sup>	EN ISO 3081
Width	1600 ±20 mm	EN ISO 3932
Tensile Strength	Warp>1800N; Weft>1200N	EN ISO 13934-1
Tear Strength	Warp>35N; Weft>40N	EN ISO 13937-2
Dimensional Change	-3%<Length<+3%;-3%<Width<+3%	EN ISO 5077
Rubbing Fastness	4-5	EN ISO 105 X12
Perspiration Fastness	4-5	EN ISO 105 E04
Washing Fastness	4-5	EN ISO 105 C06
Dry Cleaning Fastness	4-5	EN ISO 105 D01
Hypochlorite Fastness	4-5	EN ISO 105 N01
Hot Press Fastness	4-5	EN ISO 105 X11
pH	4,0 - 7,5	EN ISO 3071
Azo Test	No Azo Colorants.	EN ISO 14362-1
Application	Lining for Shoes	
Quality Management	Done	ISO 9001
Uv Protection	Done	EN ISO 13758




390 gr/m<sup>2</sup>, 100% AriPam,  
Uv protective,  
3/1 S Twill Woven Fabric



## Sample



**Ari Gabardin 7/7 - 5927  
Grey**



**Ari Gabardin 7/7 - 5926  
Navy**



## Description

100% AriPam spun heavy twill fabric. It is used as a lining inside of the shoes.  
Ari Gabardin 7/7 can also be used for winter jackets, pants and trousers.

## Technical Parameters

Name	Values	Standards
Fiber	100% AriPam	EN ISO 2076
Yarn	20/2 Ne	EN ISO 2060
Weight	390 ±10 gr/m <sup>2</sup>	EN ISO 3081
Width	1600 ±20 mm	EN ISO 3932
Tensile Strength	Warp>2800N; Weft>2200N	EN ISO 13934-1
Tear Strength	Warp>55N; Weft>50N	EN ISO 13937-2
Dimensional Change	-3%<Length<+3%;-3%<Width<+3%	EN ISO 5077
Rubbing Fastness	4-5	EN ISO 105 X12
Perspiration Fastness	4-5	EN ISO 105 E04
Washing Fastness	4-5	EN ISO 105 C06
Dry Cleaning Fastness	4-5	EN ISO 105 D01
Hypochlorite Fastness	4-5	EN ISO 105 N01
Hot Press Fastness	4-5	EN ISO 105 X11
pH	4,0 - 7,5	EN ISO 3071
Azo Test	No Azo Colorants.	EN ISO 14362-1
Application	Lining for Shoes	
Quality Management	Done	ISO 9001
Uv Protection	Done	EN ISO 13758



180 gr/m<sup>2</sup>, 100% AriPam,  
Uv protective,  
1/1 Plain Woven Fabric



Sample





**Ari Bez - 5922**  
**White**



## Description

100% AriPam spun plain fabric. It is used as a lining inside of the shoes.  
Ari Bez can also be used on outdoor medical cloth.

## Technical Parameters

Name	Values	Standards
Fiber	100% AriPam	EN ISO 2076
Yarn	60/2 Ne	EN ISO 2060
Weight	180 ±10 gr/m <sup>2</sup>	EN ISO 3081
Width	1600 ±20 mm	EN ISO 3932
Tensile Strength	Warp>1000N; Weft>800N	EN ISO 13934-1
Tear Strength	Warp>25N; Weft>20N	EN ISO 13937-2
Dimensional Change	-3%<Length<+3%;-3%<Width<+3%	EN ISO 5077
Rubbing Fastness	4-5	EN ISO 105 X12
Perspiration Fastness	4-5	EN ISO 105 E04
Washing Fastness	4-5	EN ISO 105 C06
Dry Cleaning Fastness	4-5	EN ISO 105 D01
Hypochlorite Fastness	4-5	EN ISO 105 N01
Hot Press Fastness	4-5	EN ISO 105 X11
pH	4,0 - 7,5	EN ISO 3071
Azo Test	No Azo Colorants.	EN ISO 14362-1
Application	Lining for Shoes	
Quality Management	Done	ISO 9001
Uv Protection	Done	EN ISO 13758



140 gr/m<sup>2</sup>, 100% AriPam,  
Uv protective,  
Jersey Knit Fabric



## Sample




**Ari Penye - 5865  
Grey**



**Ari Penye - 5867  
Navy**



**Ari Penye - 5866  
Black**



## Description

100% AriPam jersey knit fabric. It is used as a lining inside of the shoes.  
Ari Penye can also be used on promotional t-shirts.

## Technical Parameters

Name	Values	Standards
Fiber	100% AriPam	EN ISO 2076
Yarn	30/1 Ne	EN ISO 2060
Weight	140 ±10 gr/m <sup>2</sup>	EN ISO 3081
Width	1700 ±20 mm	EN ISO 3932
Bursting Strength	> 1000 kPa(kN/m <sup>2</sup> )	EN ISO 13938-1
Dimensional Change	-5%<Length<+5%;-5%<Width<+5%	EN ISO 5077
Rubbing Fastness	4-5	EN ISO 105 X12
Perspiration Fastness	4-5	EN ISO 105 E04
Washing Fastness	4-5	EN ISO 105 C06
Dry Cleaning Fastness	4-5	EN ISO 105 D01
Hypochlorite Fastness	4-5	EN ISO 105 N01
Hot Press Fastness	4-5	EN ISO 105 X11
pH	4,0 - 7,5	EN ISO 3071
Azo Test	No Azo Colorants.	EN ISO 14362-1
Application	Lining for Shoes	
Quality Management	Done	ISO 9001
Uv Protection	Done	EN ISO 13758





210 gr/m<sup>2</sup>, 100% AriPam,  
Uv protective,  
Pique Knit Fabric



Sample



**Ari Pike - 5928  
Grey**

**Ari Pike - 5929  
Navy**


The technical data on this guide is given for information and correct at the time of design. It can be changed without prior notice.

## Description

100% AriPam pique knit fabric. It is used as a lining inside of the shoes.  
Ari Pike can also be used on promotional t-shirts.

























## Technical Parameters

Name	Values	Standards
Fiber	100% AriPam	EN ISO 2076
Yarn	30/1 Ne	EN ISO 2060
Weight	210 ±10 gr/m <sup>2</sup>	EN ISO 3081
Width	1700 ±20 mm	EN ISO 3932
Bursting Strength	> 1400 kPa(kN/m <sup>2</sup> )	EN ISO 13938-1
Dimensional Change	-5%<Length<+5%;-5%<Width<+5%	EN ISO 5077
Rubbing Fastness	4-5	EN ISO 105 X12
Perspiration Fastness	4-5	EN ISO 105 E04
Washing Fastness	4-5	EN ISO 105 C06
Dry Cleaning Fastness	4-5	EN ISO 105 D01
Hypochlorite Fastness	4-5	EN ISO 105 N01
Hot Press Fastness	4-5	EN ISO 105 X11
pH	4,0 - 7,5	EN ISO 3071
Azo Test	No Azo Colorants.	EN ISO 14362-1
Application	Lining for Shoes	
Quality Management	Done	ISO 9001
Uv Protection	Done	EN ISO 13758

# Fashion Fabrics



# Technical Fabrics

  <b>BUILDING</b>	  <b>HOME</b>	  <b>PROTECTION</b>	  <b>MEDICAL</b>	  <b>SPORT</b>	  <b>TRANSPORT</b>
  <b>GEOLOGY</b>	  <b>PACKAGE</b>	  <b>CLOTH</b>	  <b>AGRICULTURE</b>	  <b>ENVIRONMENT</b>	  <b>MACHINE</b>

**Ariteks Fabric Factory**  
 Address: Velimese OSB Mah.210.Sokak,  
 No:9/8 59930, Ergene Tekirdag/Turkey  
 Phone: +90 282 676 41 90  
 Fax: +90 282 676 46 13  
 E-Mail: support@aritekinfo.com  
 Web: www.aritek.net